


NEW Monitored Generation Solenoid Cartridge Valves

Single Solution for High and Low Pressures

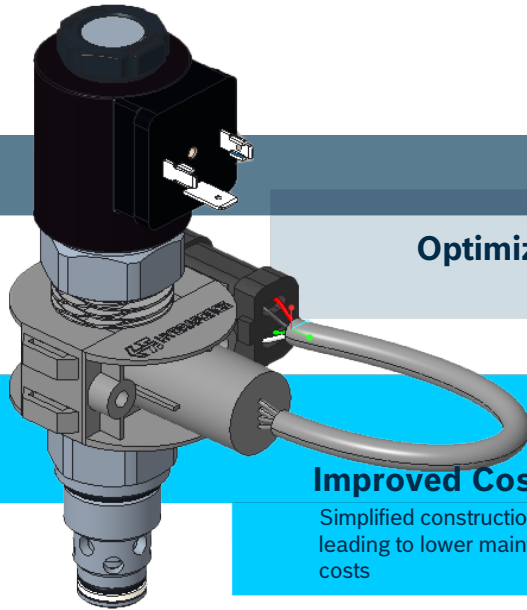

Technical data

One version covering both high and low-pressure applications
(up to 350 bar and 150 l/min)

Optimized Design

Rationalized components, particularly the D36 coil, ensuring more efficient operation

Improved Cost-Effectiveness

Simplified construction and fewer components, leading to lower maintenance and operational costs

Compact & Efficient

The common electrical actuator along the sizes enhances flexibility and reduces dimensional complexity.

DC-CH/MKT | 31/03/2025 | Tutti i diritti riservati anche per quanto riguarda qualsiasi messa a disposizione, utilizzo, riproduzione, elaborazione, trasmissione e in caso di richieste di brevetti.

rexroth
A Bosch Company

MOVECO SRL

Via Arturo Biella, 19 - 28075 Grignasco (NO)
www.movecosrl.com info@movecosrl.com
Tel. +39 0163 418 128
ITALY

